

## CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number  
**WO 03/031637 A1**

(51) International Patent Classification<sup>7</sup>: **C11D 17/04**,  
17/06, 17/00, C08J 5/18

(21) International Application Number: PCT/IN02/00202

(22) International Filing Date: 7 October 2002 (07.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
443/MUM/2001 9 October 2001 (09.10.2001) IN

(71) Applicant (for all designated States except US): **ARROW COATED PRODUCTS LIMITED** [IN/IN]; D-5 Laxmi Industrial Estate, New Link Road, Andheri (West), Mumbai 400 053, Maharashtra (IN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PATEL, Shilpan, Pravinchandra** [IN/IN]; D-5 Laxmi Industrial Estate, New Link Road, Andheri (West), Mumbai 400 053, Maharashtra (IN). **SAIYAD, Atikullah, Hussainmiya** [IN/IN]; 5310, GIDC, Ankleshwar 390 002, Gujarat (IN).

(74) Agent: **GANGULI, Prabuddha**; Vision-IPR, 103B Sena-atc, Lokhandwala Township, Akurli Road, Kandivli East, 400 101 Mumbai (IN).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(48) Date of publication of this corrected version:

3 July 2003

## (15) Information about Correction:

see PCT Gazette No. 27/2003 of 3 July 2003, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF MANUFACTURING EMBEDDED WATER SOLUBLE FILM CARRIER

(57) Abstract: This invention relates to a water-soluble film (WSF) system with embedded/entrapped water-soluble films (WSF). More particularly, the invention relates to a WSF system with actives embedded/entrapped therein such as to provide precise and desired release of actives there from and its method of manufacturing for diverse applications, in which a variety of substances such as detergents, enzymes, softeners, perfumes, pesticides, fungicides, active ingredients, dyes, pigments, hazardous chemicals, active agents for cleaning laundry, dishes, floorings, walls, furniture, fluffs, pulp, etc., and the like can be so embedded/entrapped for such purpose. The invention further discloses novel online and offline process for the manufacture of such multi-layered WSF with or without liners and of desired shapes to selectively entrap interacting / non-interacting materials and their combinations. The process also provides options for the use of a wide range of raw materials, liners such as paper, film, foil, fabric, etc.

WO 03/031637 A1

## METHOD OF MANUFACTURING EMBEDDED WATER SOLUBLE FILM CARRIER

### **FIELD OF INVENTION**

This invention relates to a water soluble film (WSF) system with embedded/entrapped water-soluble films (WSF) and a process of manufacturing the same. More particularly, the invention relates to a WSF system with actives  
5 embedded/entrapped therein such as to provide precise and desired release of actives therefrom and its method of manufacturing for diverse applications, in which a variety of substances such as detergents, enzymes, softeners, perfumes, pesticides, fungicides, active ingredients, dyes, pigments, hazardous chemicals, active agents for cleaning laundry, dishes, floorings, walls, furniture, etc., and the like  
10 can be so embedded/entrapped for such purpose.

### **BACKGROUND ART**

In various processes/operations and in day-to-day life, a number of substances including hazardous or non-hazardous chemicals are required to be delivered in the  
15 precisely measured doses.

Attempts by the packaging industry has been to develop approaches to evolve accurate delivery systems for active materials especially those that are expensive or are environmentally sensitive or have possibilities of reacting with other ingredients  
20 in formulations. There have been several attempts in the past to either encase or laminate or package different materials in water-soluble films (WSF).

The objective of delivering precise quantities of products like detergents have been being addressed by the industry for example by packaging detergents in "soluble"  
25 and "non-soluble" sachets in dosages ranging from 20 gms/sachet to 50 gms/sachet. In case of non-soluble sachets the detergents tend to adhere to statically charged packaging material surface thereby inhibiting their total transfer to the point of application. Similar problems of particles adhering to statically charged surface are faced when small and precise quantities of pesticides actives are to be packed in  
30 non soluble sachets. In the case of soluble sachets problem arising out of chemical reaction of the ingredients to the film cause serious problems in its smooth

applications. Similarly in the case of pesticide packaging the active ingredients in the package varies from about 2% to about 30% based on the formulation.

US Patent No. 4,416,791 discloses a packaging film comprising a base film of at least partially water-soluble plastics material carrying on one surface only a protective layer, in particulate form, of an inert plastics material having a contact angle to water of at least 80.degree, the said layer being effective to protect the base film surface from attack by aqueous media. Such a packaging film has the advantages that, on its unprotected side, it can be dissolved away, or partly dissolved and partly dispersed, by water, whereas on the side carrying the protective layer it is protected from attack by aqueous systems and other aggressive media. It is essential that the inert protective layer be in the form of substantially un-coalesced discrete particles attached firmly to the base film but only loosely or not at all to each other, so that if the base film is dissolved away the protective layer has little or no integrity and is rapidly dispersed. Further it provides a package comprised of the packaging film defined above, having the protective layer on its internal surface(s), so that the layer protects the package from attack by any water present inside the package. It is claimed that such a product can be used to package liquid or solid detergent useful for dosing into domestic or commercial washing machines.

20

In one of the methods described in the patent a cold-water-soluble polyvinyl alcohol / polyvinyl acetate film having a thickness of 0.0038 cm was heated to a temperature just above its glass transition temperature to render it slightly tacky. Polytetrafluoroethylene powder is sprinkled onto the upper surface of the heated film.

25

The film is then passed between rollers heated and then allowed to cool.

The limitation of US Patent No. 4,416,791 is that it requires a pre formed WSF substrate and the extent of coating of the Polytetrafluoroethylene powder would be restricted to the surface of the WSF. By this process it would not be possible to control the depth to which the Polytetrafluoroethylene powder can be embedded. The enduse of this invention would be limited to the water repelancy and the release properties of Polytetrafluoroethylene powder on the surface of the pre formed WSF.

30

US Patent No. 4,176,079 discloses an invention for dispersing an enzyme into water soluble resin and forming the resin by casting or extruding into a sheet. The sheet is then dried, if necessary, and, if required, cut into "ribbons" for incorporation  
5 into the detergent product. The ribbons of enzyme-dispersed resin may be admixed with a detergent composition in granular, viscous liquid, paste or gel form. The resulting mixture may be used directly in the washing process, particularly in an automatic dishwasher, or it may be incorporated within a water-soluble packet, for easy and convenient dispensing. In this case the water soluble resin is being used  
10 as a means to bind the enzyme to its matrix. This method of preparing the ribbons also suffers from the shortcoming that two or more reacting substances cannot be dispersed in the same film as they would interact with each other and degrade.

US Patent No. 6,378,274 discloses a process for producing a thermoformed  
15 package of the type comprising the steps of placing a first sheet of formable film over a forming die having a cavity, moulding the film into the cavity thereby forming a recess in the film, placing a composition in the thus formed recess, and sealing a second sheet of film across the recess to close the package. In particular, the prior art relates to such a process for producing a water-soluble package containing a  
20 detergent composition. The disclosure is restricted thermo formed packages formed out of a combination of soluble and insoluble films. It also needs pre formed films to be operated on offline equipment for packaging applications thereby making the process of incorporating the materials within the films very complex and requiring expensive equipment.

25 Patent No. EP 0493553 relates to a containerization system and to containers which are particularly suitable for storing, packaging and transporting toxic or hazardous products, such as agricultural chemicals. The containerization system comprises the chemical in the form of a gel, which is contained within a water soluble or water-dispersible bag. This EP '553 has limitations as it is restricted to toxic products that  
30 can be converted into gels and then packaging of gel into a WSF bag.

- Patent No. EP 0347220B1 relates to a package comprising e.g. a liquid chemical or a chemical dissolved or dispersed in an organic liquid contained in an envelope of water-soluble or water dispersible material and having a water-soluble or water dispersible seal. The patent also provides a process for the preparation of a package
- 5 according to the invention which comprises heat sealing the envelope material to obtain a water dispersible or, preferably, a water soluble heat seal. This prior art specifically discusses packaging of pesticides by means of an efficient heat seal system into a container.
- 10 Patent GB 2244258B relates to a package comprising hazardous chemical dissolved or dispersed in a liquid or gel which is contained in an envelope of water-soluble or water-dispersable material. The patent seeks to provide a new container system for agrochemicals which is safe to handle. This patent also provides a package which comprises a hazardous chemical dissolved or dispersed in a liquid or gel contained
- 15 in a water-soluble or water-dispersible laminated film. There is also discussed the delivery of toxic and hazardous materials by means of plain and laminated soluble sachets.
- It would be evident from the above state of the art that none of the prior art teach or
- 20 provide for delivery of the encased, laminated or packaged material in precise quantities. It is therefore the long-standing need of industry to develop efficient and cost effective stable embedded WSFs for controlled dosing in diverse applications and especially to embed a wide variety of substances avoiding interaction with each other within films. Further the need for carriers that can selectively carry combination
- 25 of materials with dissimilar properties such as miscible/in-miscible, hydrophobic / hydrophilic ingredients continues to elude the industry.

#### **OBJECT OF THE INVENTION**

- The main object of the present invention is to provide stable water soluble film
- 30 system having embedded/entrapped actives and to a process for the manufacture of such stable water soluble films for diverse applications, in which a variety of substances such as detergents, enzymes, softeners, perfumes, pesticides,

fungicides, pigments, hazardous chemicals, active agents for cleaning laundry, dishes, floorings, walls, furniture etc., and the like are embedded/entrapped singly or in combination for delivering them in precise and desired dosages.

- 5 Another object of the present invention is to provide an offline process for the manufacture of stable water soluble films for diverse applications, in which a variety of substances such as detergents, enzymes, softeners, perfumes, pesticides, fungicides, pigments, hazardous chemicals, active agents for cleaning laundry, dishes, floorings, walls, furniture etc., and the like are embedded/entrapped singly or  
10 in combination for delivering them in precise and desired dosages.

Another object of the invention is to provide a process of entrapping absorbent materials such as fluff, pulp and the like within WSFs.

- 15 It is yet another object of the invention to disperse diverse non-water-soluble materials on the surface and within WSFs.

Yet another object of the present invention is to provide a process for manufacture of multi-layered WSF to selectively entrap interacting / non-interacting materials.

20

Yet another object of the present invention is to provide a process for manufacture of multi-layered WSF to selectively entrap combination of materials with similar and / or dissimilar properties .

- 25 It is yet another object of the invention to provide a process of manufacturing of WSFs with materials embedded in selective areas of the WSFs in desired shapes.

- It is yet another object of the invention to provide WSFs for diverse applications, in which a variety of substances such as detergents, enzymes, softeners, perfumes, pesticides, fungicides, pigments, hazardous chemicals, active agents for cleaning  
30 laundry, dishes, floorings, walls, furniture etc., and the like are embedded for delivering them in precise and desired quantities.

It is yet another object of the invention to provide a process for the manufacture of WSFs exploiting the various embodiments of the invention using a wide range of raw materials including polyvinyl alcohol copolymer ionomers, polyvinyl alcohol  
5 homopolymer, non – ionomeric poly vinyl alcohol polymer, polymethacrylate., polyvinyl alcohol, polyacrylamide, polymethacrylamide, polyacrylic acid, polymethacrylic acid, polyethyleneglycol, polyvinylpyrrolidone, proteinaceous binders such as gelatin modified gelatins such as phthaloyl gelatin, polysaccharides, such as starch, gum arabic and dextrin and water-soluble cellulose derivatives.

10

It is yet another object of the invention to provide a process for the manufacture of WSFs with the options to use a range of liners such as paper, film, foil or fabric, preferably of film, more preferably of polyester film. The film liners may be plain, metalised, embossed, gloss or matte depending upon the desired end product  
15 parameters. Paper liner can be plain, embossed, gloss, matte, extrusion coated laminated or release coated. Fabrics made of cotton or synthetic yarns, solution coated, plain, embossed, gloss, matte, extrusion coated or laminated may be used as liner dependant dependent upon the desired end product properties. Foils made of steel, aluminum, copper or mixture thereof, more preferably aluminum foil, plain, ,  
20 embossed, gloss, matte, extrusion coated laminated or release coated. A liner may be made of a combination of any or all of the above materials. A liner may be used for single use or may be used for multiple uses.

#### **SUMMARY OF THE INVENTION**

25 Thus according to one aspect of the present invention there is provided a WSF system comprising atleast one active material embedded and/or entrapped at selected concentrations and depths/dispositions therein such that said active material thus embedded/entrapped could be delivered at precisely regulated dosages.

30

According to another aspect the present invention is directed to a process for the manufacture of embedded/entrapped water-soluble film(WSF) system comprising:

- i) providing the formulation of said WSF with or without liner material ;
- ii) subjecting the said WSF to casting wherein atleast one desired active material is embedded/entrapped prior to and/or after the said casting of the WSF.

5

According to another aspect the present invention is directed to a process for the manufacture of embedded/entrapped water-soluble film(WSF) system using a casting liner or a conveyor comprising :

- i) Mixing of the formulation of WSF ;
- 10 ii) casting of atleast one WSF at atleast one casting head ;
- iii) metering of the cast film at the respective casting head, wherein said active material to be embedded is added with the WSF prior to casting and/or atleast during casting ;
- iv) smoothening of the atleast one film thus formed ; and
- 15 v) drying of the WSF.

According to another aspect the present invention is directed to a process comprising the steps of dispersing of material to be embedded on said cast WSF prior to the step of smoothing at anyone or more of said casting heads for casting of  
20 the films. The WSF films thus embedded are wound and retained.

According to another aspect the present invention is directed to a process comprising :

- i) unwinding a pre-formed WSF from an unwinder and guiding it through  
25 guide rolls to meet the WSF with said embedded materials for further entrapping of the materials embedded ; followed by
- ii) guiding the multilayered WSF of step (i) through hot/chill device for rewinding or splitting.

30 According to another aspect the present invention is directed to using a casting conveyor without liner comprising :



- i) casting of WSF with embedded material the temperature range maintained from 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;
- ii) metering of the cast film at casting head ;
- 5 iii) smoothening of the film with the embedded materials at the primary station ;
- iv) drying of the WSF from step (i), the temperature range in the dryers ranging from 50°C to 250°C, preferably from 60°C to 200°C, more preferably from 55°C to 170°C ;
- 10 v) rewinding of the WSF.

According to yet another aspect the present invention is directed to a process using a Casting WSF on a liner comprising :

- i) providing a liner for the formation of WSF with or without treating/coating ;
- 15 ii) casting of WSF with embedded material, the temperature range of the batch solution maintained from 10°C to 95°C, preferably from 13°C to 90°C, more preferably from 15°C to 85°C ;
- iii) metering of the cast film at casting head ;
- iv) smoothening of the film with the embedded material at primary station, 20 the percentage of solid content maintained in the range of 3% to 85%, preferably in the range of 4 % to 70%, more preferably in the range of 5% to 65% ;
- v) drying of the WSF, the temperature range in the dryers maintained from 50°C to 250°C, preferably from 60°C to 200°C, more preferably 55°C to 25 170°C ;
- vi) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- vii) drying of the WSF, the temperature range in the second dryers maintained from 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 30 140°C ;

- viii) guiding the multi-layered WSF through hot / chill device for rewinding or splitting.

According to a further aspect the present invention is directed to a process using a

5 spraying method comprising :

- i) unwinding of the liner for the formation of WSF and/or a conveyor is provided.
- ii) optional coating of the liner via a primer coating station ;
- 10 iii) casting of WSF with material to be embedded at a primary casting head, the temperature range of the batch solution maintained from 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;
- iv) metering of the cast film at a casting head ;
- v) executing a controlled dosing by spraying of pre-measured material to be embedded by primary sprayer ;
- 15 vi) smoothening of the film with the embedded material at a primary station ;
- vii) drying of the WSF at a dryer, the temperature range in the dryers maintained in the range of 50°C to 250°C, preferably from 60°C to 200°C, more preferably 55°C to 170°C ;
- 20 viii) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- ix) drying of the WSF, the temperature range in the second dryer maintained 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 140°C ;
- 25 x) guiding the multilayered WSF through hot / chill cylinder for rewinding or splitting.

According to another aspect the present invention is directed to a process using a  
Secondary application on partially formed film comprising :

- 30 i) unwinding of the liner for the formation of WSF and/or providing a conveyor ;

- ii) optional coating of the liner via a primer coating station ;
- iii) casting of WSF with material to be embedded at primary casting head, the temperature range of the batch maintained in the range of 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;
- 5 iv) metering of the cast film at casting head ;
- v) smoothening of the film with the embedded material at primary station, drying of the WSF, the temperature range in the dryers maintained in the range of 50°C to 250°C, preferably from 60°C to 200°C, more preferably 55°C to 170°C ;
- 10 vi) executing a controlled dosing by spraying of pre-measured material to be embedded by secondary disperser ;
- vii) smoothening of the film with the embedded material at secondary station ;
- viii) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- 15 ix) drying of the WSF, the temperature range in the second dryers) maintained in the range of 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 140°C ;
- x) guiding the multilayered WSF through hot / chill cylinder for rewinding or splitting. Optionally offline or online splitting between the WSF film and the liner.
- 20

According to another aspect the present invention is directed to online entrapment comprising :

- 25 i) unwinding of the liner for the formation of WSF and/or providing a conveyor ;
- ii) optional coating of the liner via a primer coating station ;
- iii) casting of WSF with material to be embedded at primary casting head.
- 30 the temperature range maintained 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;

- iv) metering of the cast film at casting head ;
- v) smoothening of the film with the embedded material at primary station ;
- 5 vi) drying of the WSF, the temperature range in the dryers maintained in the range of 50°C to 250°C, preferably from 60°C to 200°C, more preferably from 55°C to 170°C ;
- vii) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- 10 viii) drying of the WSF, the temperature range in the second dryers maintained from 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 140°C ;
- ix) unwinding of a pre-formed WSF from an unwinder and guiding it through the guide rolls to meet the WSF, with embedded material for entrapping of materials embedded.

15

Preferably, in the above process of the invention, the materials of the WSF formulation is taken in a batch reactor and mixed intimately to ensure complete dissolution in the desired solvent. As would be evident from the above various possible embodiments of the process can be followed.

20

In one of the embodiments of this of this invention the materials to be embedded in the WSF are added to the batch solution and mixed thoroughly before feeding it to the casting head for further processing. The materials that can be taken into the batch mixing are selected from those that are water-soluble, sheer insensitive, 25 temperature resistant, like certain agrochemicals, pesticides, insecticides, softners, surfactants, perfumes for detergent and laundry industry, disinfectants, de-odorizing liquids, etc.

In another embodiment of this invention the materials to be embedded in the WSF 30 may optionally be introduced in the process at the primary, secondary, tertiary and subsequent sprayers and or at the second or subsequent casting heads fed from second and/or subsequent batch mixers.

In another embodiment of the present invention the materials to be embedded is dispensed in between incoming cured or uncured WSFs

- 5 In another embodiment of the present invention the process maybe carried out with the aid of a self-rolling conveyor.

In yet another embodiment of the present invention the process maybe carried out with the aid of a casting liner.

10

**DETAILED DESCRIPTION IN RELATION TO ACCOMPANYING FIGURES**

The details of the invention its objects and advantages are explained hereunder in greater details in relation to non-limiting exemplary illustrations given in figs 1 - 4

- 15 The explanation to the part numbers in figure 1 is given below:

1 Conveyor; 2 Guide Roll; 3 Batch Mix; 4 Primary Casting Head; 5 Primary Sprayer; 6 Smoothing Rolls; 7 Dryer; 8 Secondary Sprayer; 9 Secondary Casting Head; 10 Dryer; 11 Tertiary Sprayer; 12 Disperser for Entrapment; 13  
20 Guide Roll; 14 Chilling Cylinder; 15 Rewinder; 16 Guide Rolls; 17 Unwinder; 18 Smoothing Rolls; 19 Batch Mix; 20 Nip Roll;

Accordingly as illustrated in Figure 1 the process comprises of the following steps :

- 25 1. Batch Mixing of the formulation of WSF and optionally the material to be embedded;
2. Casting of WSF with or without the material to be embedded at primary casting head ;
3. Metering of the cast film at casting head ;
4. Optionally dispersing of material to be embedded by primary sprayer ;
- 30 5. Smoothing of the film with or without the embedded materials at the primary station ;
6. Drying of the WSF from step 2 ;

7. Optional spraying of material to be embedded using a secondary sprayer ;
8. Smoothening of the film with or without the embedded materials at the secondary station ;
9. Drying of the WSF from step 7 ;
- 5 10. Casting of WSF with or without the material to be embedded at secondary casting head ;
11. Optional spraying of material to be embedded by a tertiary disperser ;
12. Rewinding of the WSF ;
- 10 13. Optionally as a post-step 11 step unwind a pre-formed WSF from an unwinder and guiding it through the guide rolls to meet the WSF from step 11 for entrapping of materials to be embedded ;
14. Guide the multilayered WSF of step 13 through hot / chill cylinder for rewinding or splitting ;
- 15 15. Optionally the steps 1 to 14 may also be carried out on a casting liner (Figure 1) or a conveyor (Figure 2).

The invention and the various embodiments are further explained hereunder in relation to the accompanying figures :

20

#### **Casting Conveyor without Liner [ Figure 1]**

This process comprises of the following:

1. Casting of WSF on (1) at (4) with embedded material in the batch mix. The temperature range of the batch solution is in between may vary from around  
25 10°C to around 95°C, preferably around 13°C to around 90°C, preferably around 15°C to around 85°C.
2. Metering of the cast film at casting head.
3. Smoothening of the film with the embedded materials at the primary station (6).
- 30 4. Drying of the WSF from step 1 at (7). The temperature range in the dryers may vary from around 50°C to around 250°C, preferably between around

60°C to around 200°C, more preferably between around 55°C to around 170°C. Rewinding of the WSF at (15).

### **Casting WSF on a liner (Figure 2)**

5

The explanation to the part numbers in figure 2 is given below:

25 Unwinder of "Carrier Web"; 26 Primer Coating; 27 Batch Mix; 28 Primary Casting Head; 29 Primary Sprayer; 30 Smoothing Roll; 31 Dryer; 32 Secondary Sprayer; 33 Secondary Casting Head; 34 Dryer; 35 Tertiary Sprayer; 36 Disperser for Entrapment; 37 Guide Roll; 38 Chilling Cylinder; 39 Rewinder; 40 Guide Rolls; 41 Unwinder; 42 Smoothing Rollers; 43 Batch Mix; 44 Nip Roll;

15 This process comprises of the following:

1. Unwinding of the liner at (25) for the formation of WSF which can be optionally treated or untreated and coated or uncoated. Liners can be of paper, film, foil or fabric, preferably of film, more preferably of polyester film. The films can be in the range of 2 microns to 500 microns, preferably in the range of 10 microns – 300 microns, more preferably in the range of 12 microns – 250 microns. The film liner may be plain, metallised, embossed, gloss, matte, extrusion coated laminated or release coated depending on the desired characteristics of the end product. Paper Liner are also used for production of WSF film. Paper liners that accept temperatures needed for production of WSF, GSM(Grams per sq meter – the standard for measuring weight of paper) may be in the range of around 7 gms to around 500 gms, preferably a range of around 20 gm to around 300 gms, more preferably in the range of around 60 gm to around 180 gms. The paper liner may be plain, embossed, gloss, matte, extrusion coated laminated or release coated depending on the desired characteristics of the end product. Fabrics made of cotton or synthetic yams, solution coated, plain, embossed, gloss, matte, extrusion coated or laminated may be used as liner based on the desired end product properties.

2. Optional coating of the liner via a primer coating station (26).
3. Casting of WSF on (25) at (28) with embedded material in the batch mix. The temperature range of the batch solution may be around 10°C to around 95°C, preferably around 13°C to around 90°C, more preferably around 15°C to around 85°C.
4. Metering of the cast film at casting head.
5. Smoothing of the film by (30) with the embedded material at primary station.  
The percentage of solid content may be in the range of around 3% to around 85%, preferably in the range of around 4 % to around 70%, more preferably in the range of around 5% to around 65%
6. Drying of the WSF from step 3 at (31). The temperature range in the dryers may be set from around 50°C to around 250°C, preferably from around 60°C to around 200°C, more preferably around 55°C to around 170°C. The temperature range of the batch solution may vary from around 10°C to around 95°C, preferably around 13°C to around 90°C, more preferably around 15°C to around 85°C..
7. Casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) (33).
8. Drying of the WSF from step 7 at (34). The temperature range in the second dryers (34) may be from around 50°C to around 200°C, preferably around 60°C to around 160°C, more preferably around 55°C to around 140°C.
9. The multi-layered WSF of step 8 is guided through hot / chill cylinder(38) for rewinding or splitting at (39).

#### **Spraying Method (Figure 2)**

This process comprises of the following

1. Unwinding of the liner at 25 for the formation of WSF. Optionally a conveyor can be used.
2. Optional coating of the liner via a primer coating station (26).



3. Casting of WSF with material to be embedded at primary casting head (28).  
The temperature range of the batch solution may vary from around 10°C to around 95°C, preferably around 13°C to around 90°C, more preferably around 15°C to around 85°C.
- 5 4. Metering of the cast film at casting head.
5. Spraying of pre-measured material to be embedded by primary sprayer (29).
6. Smoothing of the film with the embedded material at primary station (30).
7. Drying of the WSF from step 5 at dryer (31). The temperature range in the dryers may be set from 50°C to around 250°C, preferably from around 60°C to around 200°C, more preferably around 55°C to around 170°C.
- 10 8. Casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) (33).
9. Drying of the WSF from step 8 at dryer (34). The temperature range in the second dryer (34) may be from around 50°C to around 200°C, preferably around 60°C to around 160°C, more preferably around 55°C to around 140°C.
- 15 10. The multilayered WSF of step 8 is guided through hot / chill cylinder (38) for rewinding or splitting at (39).

#### **Secondary application on partially formed film [Figure 2]**

- 20 This process comprises of
  1. Unwinding of the liner at (25) for the formation of WSF. Optionally a conveyor can be used.
  2. Optional coating of the liner via a primer coating station (26).
  3. Casting of WSF with material to be embedded at primary casting head (28).
  - 25 The temperature range of the batch solution may vary from around 10°C to around 95°C, preferably around 13°C to around 90°C, more preferably around 15°C to around 85°C.
  4. Metering of the cast film at casting head.
  5. Smoothing of the film with the embedded material at primary station (30).

6. Drying of the WSF from step 5 at dryer (31). The temperature range in the dryers may be set from 50°C to around 250°C, preferably from around 60°C to around 200°C, more preferably around 55°C to around 170°C.
7. Spraying of pre-measured material to be embedded by secondary disperser (32).
8. Smoothing of the film with the embedded material at secondary station (42).
9. Casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) (33).
10. Drying of the WSF from step 9 at dryer (34). The temperature range in the second dryers (34) may be from around 50°C to around 200°C, preferably around 60°C to around 160°C, more preferably around 55°C to around 140°C.
11. The multilayered WSF of step 9 is guided through hot / chill cylinder (38) for rewinding or splitting at (39). Optionally offline or online splitting between the WSF film and the liner can be done.

#### **Online Entrapment Method [Figure 2]**

The process comprises of the following:

1. Unwinding of the liner at (25) for the formation of WSF, optionally a conveyor can be used.
2. Optional coating of the liner via a primer coating station (26).
3. Casting of WSF with material to be embedded at primary casting head (28). The temperature range of the batch solution may vary from around 10°C to around 95°C, preferably around 13°C to around 90°C, more preferably around 15°C to around 85°C.
4. Metering of the cast film at casting head.
5. Smoothing of the film with the embedded material at primary station (30).
6. Drying of the WSF from step 5 at dryer (31) The temperature range in the dryers may vary from around 50°C to around 250°C, preferably from around 60°C to around 200°C, more preferably from around 55°C to around 170°C.

7. Casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) (33).
8. Drying of the WSF from step 7 at dryer (34). The temperature range in the second dryers (7) may be from around 50°C to around 200°C, preferably around 60°C to around 160°C, more preferably around 55°C to around 140°C.
9. Unwinding of a pre-formed WSF from an unwinder (41) and guiding it through the guide rolls (40) to meet the WSF from step 8 for entrapping of materials to be embedded. Both the liners along with WSF film, which may be semi-cured WSF and the entrapments, may remain in the roll form or sheet form in its original construction, stripping from casting liner can be done immediately or after an self-curing ageing period ranging from around 1 hrs. to around 720 hrs., prior to splitting the liners so as to deliver the final WSF product with entrapped materials.
10. If desired the multi-layered WSF of step 9 may be guided through hot / chill cylinder (38) for rewinding or splitting at (39). Optionally offline or online splitting between the WSF film and the liner can be done

The process described above offers various possibilities for the manufacture of WSFs with entrapped materials either on a liner or a conveyor. Some of the product options the may be exercised are as follows:

- H / E / H
- H / E / C
- H / E / H / E / H ..... n times
- C / E / C / E / ..... n times
- C / E / C / E / C ..... n times
- C / E / C ..... n times
- L / UC / E / UH / E ... n times
- L / UH / E / UH / E ... n times
- L / UC / E / UC / E ... n times
- L / UC / E / H / L / E ... n times
- L / UH / E / H / L / E ... n times

L / UC / E / C / L / E ... n times

Where

U = Uncured; H = Hot Water Soluble Film; C = Cold Water Soluble Film

5 E = Embedded Material; L = Liner

and the value of "n" is decided based on the application of the final multilayered embedded WSF.

10 The above sequence may be repeated in multiple layers as per the requirements of the end use of the multiply embedded WSFs. Further this process also allows the manufacture of multilayered embedded WSF using combinations of Cold WSFs and Hot WSFs in various sequences. It also provides the options of using cured/uncured films of CWSFs and HWSFs in any desired sequences

15

Dimples or other embossed or patterned designs can be created during entrapment by using such designed male/female rollers (46,51 Sheet No. 3) or rollers (60,61 Sheet No. 4). In case of casting on liner method both the liners along with WSF film, semi-cured WSF and the entrapments may remain in roll form or sheet form in its original construction, stripping from casting liner can be done immediately or after an self curing aging period ranging from around 1 hrs to around 720 hrs., prior to splitting the liners so as to deliver the final WSF film with entrapped materials.

20

Certain materials such as highly alkaline or highly acidic materials may react adversely if added in the batch mix process or if sprayed before the gelling process or before the film forming process and may therefore necessitate the use of entrapment method for incorporating such materials. Certain liquids like oil based perfumes, aromas, softening agents, cleaning agents etc or solvent based aromas, softening agents, cleaning agents etc may be entrapped more efficiently with entrapment method disclosed in this invention.

30

**Offline Entrapment Method**

The process to incorporate such sensitive materials described above comprises of the following:

**5 Vertical Entrapment Method (Figure 3).**

The explanation to the part numbers in figure 3 is given below:

10 45 Unwinder; 46 Affixing Roller; 47 Guide Roll; 48 Disperser for Vertical Entrapment; 49 Guide Roll; 50 Unwinder; 51 Affixing Roller; 52 Rewinder;

1. Unwinding of the WSF films (45) and (50) with or without liner.
2. Dispensing of the embodiment at (48) in between two affixing guide rollers (47 & 49).
- 15 3. Affixing of the WSF films from step 2 at the affixing rollers (46 & 51).
4. Rewinding in roll form or sheet form or fan-fold form. Optionally the film can be with or without casting liners. The casting liners can be stripped immediately or after aging period of around 1 to around 720 hrs. or can be supplied all together and the end user may be informed to strip the casting
- 20 liner before use. The entrapped film can also be slit in ribbons, tapes, perforated sheets, perforated tapes, perforated ribbons or cut sheets of any size.

Such a process offers various process and product options such as :

- 25 1. Entrapped material in WSF With or without carrier.
2. Entrapped material in WSF in Roll form or pouch form
3. Entrapped material in WSF in Roll form with perforates
4. Entrapped material in WSF in Sheet form with multiple pouches
5. All above Entrapped material in WSF with casting liner for the consumer to
- 30 remove immediately or after aging period of around 1 hr to around 720 hrs.

Some of the product options the may be exercised are as follows:

- H/E/H  
H/E/C  
H/E/H/E/H ..... n times  
5 C/E/C/E/ ..... n times  
C/E/C/E/C ..... n times  
C/E/C ..... n times  
L/UC/E/UH/E ... n times  
L/UH/E/UH/E ... n times  
10 L/UC/E/UC/E ... n times  
L/UC/E/H/L/E ... n times  
L/UH/E/H/L/E ... n times  
L/UC/E/C/L/E ... n times
- 15 Where  
U = Uncured; H = Hot Water Soluble Film; C = Cold Water Soluble Film  
E = Embedded Material; L = Liner
- and the value of "n" is decided based on the application of the final multilayered  
20 embedded WSF.

The above sequence may be repeated in multiple layers as per the requirements of the end use of the multiply embedded WSFs. Further this process also allows the manufacture of multilayered embedded WSF using combinations of Cold WSFs and  
25 Hot WSFs in various sequences. It also provides the options of using cured/uncured films of CWSFs and HWSFs in any desired sequences

#### **Horizontal Entrapment Method (Figure 4).**

30 The explanation to the part numbers in figure 4 is given below:

55 Unwinder; 56 Guide Roll; 57 Dispenser for Horizontal Entrapment; 58 Guide Roll; 59 Unwinder; 60 Affixing Roller; 61 Affixing Roller; 62 Rewinder; 63 Spillage Controller Knife;

- 5 1. Unwinding of the WSF films (59) and (55) with or without liner.
2. Dispensing of the embodiment at (57) in between two affixing guide rollers (58 & 56).
3. Affixing of the WSF films from step 2 at the affixing rollers (60 & 61).
4. Rewinding in roll form or sheet form or fan-fold form. Optionally the film can be
- 10 with or without casting liners. The casting liners can be stripped immediately or after aging period of around 1 hr to around 720 hrs. or can be supplied all together and the end user may be informed to strip the casting liner before use. The entrapped film can also be slit in ribbons, tapes, perforated sheets, perforated tapes, perforated ribbons or cut sheets of any size.

15

*Such a process offers various process and product options such as :*

1. Embedded/entrapped material in WSF With or without carrier.
2. Embedded/Entrapped material in WSF in Roll form or pouch form
3. Embedded/Entrapped material in WSF in Roll form with perforates
- 20 4. Embedde/Entrapped material in WSF in Sheet form with multiple pouches
5. All above Embedded/Entrapped materials in WSF with casting liner for the enduser to remove after aging period of around 1 hr to around 720 hrs.

25 In the above options the WSF film may be pre-embedded and used for the manufacture of the above product options.

In yet other embodiment of the invention, materials that are stable in hot water conditions may be introduced into Hot Water Soluble Films(HWSF) and those that are sensitive to cold conditions can be incorporated in Hot or Cold Water Soluble

30 Films(CWSF).

### Applications of the process options

The invention with various embodiments are now further illustrated with a few non – limiting Examples :

5

#### Example I

#### Embedding of Actives such as Piian Liquid in WSF

- 10 Piian is a water dispersable deodorizer which is commercially available from Piian Systems, USA . Piian was added to the pre-mixed WSF formulation batch and stirred for 6 hours. This was followed by a period of another 6 hours with continuous slow stirring of the solution. The solution was then casted on a continuous casting line. It was then dried and spilt. Several samples of varying compositions were made  
15 to incorporate 10% Piian to 90% in WSFs.

The Grammage per Square Meter (GSM) for the Piian incorporated WSF measured as per IS1060 is represented as (A).

- 20 A reference WSF without the incorporation of Piian was prepared under identical conditions. The GSM of this reference sample is represented as (B). The Piian loaded in the WSF is therefore  $A - B = C$ .

Strips of 10 x 10 cms were cut from the material WSF loaded with Piian.

25

Following are the characteristics of the WSF strips loaded with Piian.:

Piian Loaded film = 30.5 GSM ( $\pm \frac{1}{2}$  Gm)

- 30 Loading of Piian = 5 GSM

Film thickness of Piian loaded WSF = 28 microns



GSM of the Reference film without Piian = 26 gms.(± 1 gm)

Following are test results of reference WSF and Piian loaded WSF

5

Tensile Strength of the reference film

(kg/cm<sup>2</sup>)Dir-I = 380.74 Test Method – ASTM D-883

Dir-II = 382.67 Test Method – ASTM D-883

Young Modulus

10 (kg/mm<sup>2</sup>)Dir-I = 13.19 Test Method – ASTM D-882

Dir-II = 8.14 Test Method – ASTM D-882

Elongation(%)

(kg/cm<sup>2</sup>)Dir-I = 259.27 Test Method – ASTM D-882

Dir-II = 252.90 Test Method – ASTM D-882

15 Puncture Resistance

(Ozs. Inches/Tear Inch) = 270.00 Test Method – IS-1060

Tensile Strength of the Piian Load WSF

20 (kg/cm<sup>2</sup>)Dir-I = 329.5 Test Method – ASTM D-883

Dir-II = 381.1 Test Method – ASTM D-883

Young Modulus

(kg/mm<sup>2</sup>)Dir-I = 7.38 Test Method – ASTM D-882

Dir-II = 11.81 Test Method – ASTM D-882

25 Elongation(%)

(kg/cm<sup>2</sup>)Dir-I = 252.36 Test Method – ASTM D-882

Dir-II = 291.50 Test Method – ASTM D-882

Puncture Resistance

(Ozs. Inches/Tear Inch) = 225.00 Test Method – IS-1060

30

Dissolution in seconds = 86 secs at 30C

Breaking of the film = 3.14 secs at 30 C

The film properties of the Piian loaded WSF, together with the uniform dispersion of the Piian in the WSF illustrates that Piian can be delivered in precise quantities by  
5 incorporating it in the WSF using the process disclosed in the invention.

In one of the variants of the process described in this invention, pre-dissolved enzymes may be mixed in a WSF formulation and a controlled casting on a preformed substrate/liner based WSF film is possible. Alternatively two pre-formed  
10 substrate based WSF films may be used. A water-based enzyme may be loaded to precisely fill the center of the two films. The water based enzyme helps to affix the two films substrates so that the enzymes are sandwiched in between the films thereby resulting in an enzyme loaded WSF. The two substrates can then be stripped off after appropriate ageing.

15 Enzymes in precise quantities can be incorporated in singly or multi-layered WSFs by the process described in this invention so that the processor or the user does no inhalation of the enzyme. The enzyme embedded WSF can be incorporated into detergent formulations or added to washing medium in a machine or a washing  
20 vessel such as a bucket to ensure that the precise dosage of enzymes are added at the point of application.

#### Example II

#### 25 Incorporation of large particles in WSFs

Non-soluble Acrylic resins (72 – 75 microns) were dispersed into cold water-based solutions to form a high viscous dispersion. The liquid dispersion was dropped in between two films through a motorized valve controlled slot nozzle to have a margin  
30 at the end of the webs, thereby not allowing the dispersion to ooze out from the sides. Cold water was used as the solvent. Both the WSFs used were Hot Water Soluble formulations. In this process the Hot Water Soluble Films. Do not get

affected by cold-water dispersion and therefore remain entrapped till the acrylic entrapped film passes through the dried and reaches the rewinder. Typically the film is split from its casting liner after an appropriate aging period.

- 5 The properties of the acrylic incorporated films were:

Acrylic Loaded GSM = 60 GSM ( $\pm \frac{1}{2}$  Gm)

Microns of Acrylic loaded film = 140 microns

10

Base films GSM = 58 GSM ( $\pm 1$  gm)

Weight of Acrylic Entrapping = 2 GSM

- 15 Similarly following are test results of reference WSF and Acrylic resin loaded WSF

Tensile Base film

(kg/cm<sup>2</sup>) Dir-I = 380.74 Test Method – ASTM D-883

Dir-II = 382.67 Test Method – ASTM D-883

20 Young Modulus

(kg/mm<sup>2</sup>) Dir-I = 13.19 Test Method – ASTM D-882

Dir-II = 8.14 Test Method – ASTM D-882

Elongation(%)

(kg/cm<sup>2</sup>) Dir-I = 259.27 Test Method – ASTM D-882

25 Dir-II = 252.90 Test Method – ASTM D-882

Puncture Resistance

(Ozs. Inches/Tear Inch) = 270.00 Test Method – IS-1060

Tensile Acrylic Entrapped film

30 (kg/cm<sup>2</sup>) Dir-I = 80.69 Test Method – ASTM D-883

Dir-II = 83.46 Test Method – ASTM D-883

Young Modulus

	(kg/mm <sup>2</sup> )Dir-I	=	2.79	Test Method – ASTM D-882
	Dir-II	=	3.25	Test Method – ASTM D-882
	Elongation(%)			
	(kg/cm <sup>2</sup> )Dir-I	=	229.5	Test Method – ASTM D-882
5	Dir-II	=	206.7	Test Method – ASTM D-882
	Puncture Resistance			
	(Ozs. Inches/Tear Inch)	=	180.0	Test Method – IS-1060
	Dissolution of film in seconds			
10		=	47 secs at 30C	
	Breaking of the film			
		=	3.75 secs at 30 C	

The WSF characteristic with the hydrophobic polymer indicates that the process disclosed in the invention can be effectively used to embed any hydrophobic materials of diverse shapes and sizes within a WSF matrix.

Also this application shows the possibility of using two hot water soluble films or a combination thereof, taking advantage of the hydrophilic properties. This application also shows the advantage of using casting liners.

### Example III

#### Films incorporating water insoluble fine particles

The performance of the films based on water insoluble fine particles were prepared by the process described in this invention. Fine particle sized iron oxide (5-10 Microns) was dispersed in water based formulations to form a high viscous dispersion. The liquid dispersion thus obtained was precisely dropped in between two films through a motorized valve controlled slot nozzle in such a manner that a margin was available at the end of the webs, so as not to allow the dispersion to

ooze out from the sides. In this case warm water at around 40°C was used to deliver the dispersion to between two Cold WSF webs. .

The properties of the ferric oxide incorporated films were:

5	GSM of Iron Oxide Loaded WSF	=	73 GSM ( $\pm \frac{1}{2}$ Gm)	
	Thickness of Iron Oxide Loaded WSF	=	55 microns	
10	GSM of reference WSF	=	58 GSM ( $\pm 1$ gm)	
	Weight of Iron Oxide Entrapping	=	15 GSM	
	Tensile Strength of Entrapped film			
15	(kg/cm <sup>2</sup> )Dir-I	=	325.87	Test Method – ASTM D-883
	Dir-II	=	327.77	Test Method – ASTM D-883
	Young Modulus			
	(kg/mm <sup>2</sup> )Dir-I	=	7.18	Test Method – ASTM D-882
	Dir-II	=	8.26	Test Method – ASTM D-882
20	Elongation(%)			
	(kg/cm <sup>2</sup> )Dir-I	=	341.9	Test Method – ASTM D-882
	Dir-II	=	324.27	Test Method – ASTM D-882
	Puncture Resistance			
	(Ozs. Inches/Tear Inch)	=	600	Test Method – IS-1060
25	Dissolution in seconds	=	37 secs at 60C	
	Breaking of the film	=	19 secs at 60 C	
30	As illustrated in the earlier examples the material embedded films have favorable film properties and cab be used for diverse application. This application provides possibilities of embedding environmentally sensitive materials, wastes and toxic			

materials of diverse shapes, sizes and reactivities within an appropriate WSF Matrix in precise quantities for storage, transportation or disposal. This method may also be used to embed powdered or granular materials of any shapes or sizes such as pesticides, solid deodorants, disinfectants, uncoated enzymes, toxic products etc.

5 which are to be delivered to their point of application/action or storage.

These applications also clearly demonstrate the wide number of product and process options using the methods disclosed in this invention.

We claim

1. A WSF system comprising atleast one active material embedded/entrapped at selective concentration and depths/dispositions therein such that the said active material thus embedded/entrapped is delivered at preselected desired quantities.
2. A WSF system as claimed in claim 1 wherein said embedded/entrapped materials are selected active materials.
3. A WSF system as claimed in claim 2 wherein said active materials are selected from detergents, enzymes, softeners, perfumes, pesticides, fungicides, active ingredients, dyes, pigments, hazardous chemicals, active agents for cleaning laundry, dishes, floorings, walls, furniture, and the like embedded for delivering in precise and desired quantities.
4. A WSF system as claimed in anyone of claims 1 to 3 comprising multilayered film.
5. A process for the manufacture of embedded/entrapped water-soluble film(WSF)system comprising :
  - i) providing the formulation of said WSF with or without liner material ;
  - ii) subjecting the said WSF to casting wherein atleast one desired active material is embedded/entrapped prior to and/or after the said casting of the WSF;
  - iii) the casting of WSF with or without liner material.
6. A process as claimed in claim 5 on a casting liner or a conveyor comprising
  - i) mixing of the formulation of WSF ;

- ii) casting of atleast one WSF at atleast one casting head ;
  - iii) metering of the cast film at the respective casting head, wherein said material to be embedded is added with the WSF prior to casting and/or atleast during casting ;
  - 5 iv) smoothening of the atleast one film thus formed ; and
  - v) drying of the WSF.
7. A process as claimed in claim 6 comprising the steps of dispersing of material to be embedded on said cast WSF prior to the step of smoothing at anyone or
- 10 more of said casting heads for casting of the films.
8. A process as claimed in anyone of claims 5 to 7 wherein the WSF films thus embedded are wound and retained.
- 15 9. A process as claimed in anyone of claims 1 to 8 comprising :
- i) unwinding a pre-formed WSF from an unwinder and guiding it through guide rolls to meet the WSF with said embedded materials for further entrapping of the materials embedded ; followed by
  - 20 ii) guiding the multilayered WSF of step 13 through hot/chill device for rewinding or splitting.
10. A process as claimed in anyone of claims 5 to 9 using a casting conveyor without liner comprising :
- 25
- i) casting of WSF with embedded material the temperature range maintained from 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;
  - ii) metering of the cast film at casting head ;
  - 30 iii) smoothening of the film with the embedded materials at the primary station ;



- iv) drying of the WSF from step (i), the temperature range in the dryers ranging from 50°C to 250°C, preferably from 60°C to 200°C, more preferably from 55°C to 170°C ;
- v) rewinding of the WSF.

5

11. A process claimed in anyone of claims 5 to 9 using a Casting WSF on a liner comprising :

- i) providing a liner for the formation of WSF with or without treating/coating ;
- 10 ii) casting of WSF with embedded material, the temperature range of the batch solution maintained from 10°C to 95°C, preferably from 13°C to 90°C, more preferably from 15°C to 85°C ;
- iii) metering of the cast film at casting head ;
- 15 iv) smoothening of the film with the embedded material at primary station, the percentage of solid content maintained in the range of 3% to 85%, preferably in the range of 4 % to 70%, more preferably in the range of 5% to 65% ;
- v) drying of the WSF, the temperature range in the dryers maintained from 50°C to 250°C, preferably from 60°C to 200°C, more preferably 55°C to 20 170°C ;
- vi) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- vii) drying of the WSF, the temperature range in the second dryers maintained from 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 25 140°C ;
- viii) guiding the multi-layered WSF through hot/chill device for rewinding or splitting.

12. A process as claimed in anyone of claims 5 to 9 using a Spraying Method comprising :

30

- i) unwinding of the liner for the formation of WSF and/or a conveyor is provided.
- ii) optional coating of the liner via a primer coating station ;
- 5      iii) casting of WSF with material to be embedded at a primary casting head, the temperature range of the batch solution maintained from 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;
- iv) metering of the cast film at a casting head ;
- v) executing a controlled dosing by spraying of pre-measured material to be embedded by primary sprayer ;
- 10      vi) smoothening of the film with the embedded material at a primary station ;
- vii) drying of the WSF at a dryer, the temperature range in the dryers maintained in the range of 50°C to 250°C, preferably from 60°C to 200°C, more preferably 55°C to 170°C ;
- 15      viii) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- ix) drying of the WSF, the temperature range in the second dryer maintained 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 140°C ;
- 20      x) guiding the multilayered WSF through hot / chill cylinder for rewinding or splitting.

13.A process as claimed in anyone of claims 5 to 9 using a Secondary application on partially formed film comprising :

25

- i) unwinding of the liner for the formation of WSF and/or providing a conveyor ;
- ii) optional coating of the liner via a primer coating station ;
- 30      iii) casting of WSF with material to be embedded at primary casting head, the temperature range of the batch maintained in the range of 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;

- iv) metering of the cast film at casting head ;
- v) smoothening of the film with the embedded material at primary station, drying of the WSF, the temperature range in the dryers maintained in the range of 50°C to 250°C, preferably from 60°C to 200°C, more preferably 55°C to 170°C ;
- 5 vi) executing a controlled dosing by spraying of pre-measured material to be embedded by secondary disperser ;
- vii) smoothening of the film with the embedded material at secondary station ;
- 10 viii) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- ix) drying of the WSF, the temperature range in the second dryers maintained in the range of 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 140°C ;
- 15 x) guiding the multilayered WSF through hot / chill cylinder for rewinding or splitting. Optionally offline or online splitting between the WSF film and the liner.

14.A process as claimed in anyone of claims 5 to 9 following online entrapment comprising :

- i) unwinding of the liner for the formation of WSF and/or providing a conveyor ;
- ii) optional coating of the liner via a primer coating station ;
- 25 iii) casting of WSF with material to be embedded at primary casting head, the temperature range maintained 10°C to 95°C, preferably 13°C to 90°C, more preferably 15°C to 85°C ;
- iv) metering of the cast film at casting head ;
- v) smoothening of the film with the embedded material at primary station ;

- vi) drying of the WSF, the temperature range in the dryers maintained in the range of 50°C to 250°C, preferably from 60°C to 200°C, more preferably from 55°C to 170°C ;
- 5 vii) casting of WSF with or without the material to be embedded at secondary/tertiary subsequent casting head(s) ;
- viii) drying of the WSF, the temperature range in the second dryers maintained from 50°C to 200°C, preferably 60°C to 160°C, more preferably 55°C to 140°C ;
- 10 ix) unwinding of a pre-formed WSF from an unwinder and guiding it through the guide rolls to meet the WSF, with embedded material for entrapping of materials embedded.
- 15 15. A process as claimed in claim 14 wherein both the said liners along with WSF film, semi-cured WSF and the entrapments, maintained in the roll form or sheet form in its original construction, stripping from casting liner being done immediately or after an self-curing ageing period ranging from 1 hrs. to 720 hrs., prior to splitting the liners so as to deliver the final WSF product with entrapped materials.
- 20 16. A process as claimed in anyone of claims 14 or 15 wherein the multi-layered WSF are guided through hot / chill cylinder for rewinding or splitting.
- 25 17. A process as claimed in anyone of claims 14 to 16 comprising offline and/or online splitting between the WSF film and the liner.
18. A process as claimed in anyone of claims 14 to 17 used in the manufacture of multilayered embedded WSFs with entrapped materials on a liner and/or a conveyor.
- 30 19. A process as claimed in anyone of claims 14 to 18 for the manufacture of multilayered embedded WSFs with layering selected from uncured, hot water soluble film, cold water soluble film, embedded material and liner.

20. A process as claimed in anyone of claims 5 to 19 wherein said entrapment of the embedded material is carried out following an Offline Entrapment Method comprising of a Vertical Entrapment method.
- 5
21. A process as claimed in anyone of claims 5 to 20 wherein said entrapment of the embedded material is carried out following an Offline Entrapment Method comprising of a Horizontal Entrapment method.
- 10
22. A process as claimed in anyone of claims 5 to 21 wherein the Offline Vertical Entrapment comprise :
- i) unwinding of the WSF films with or without liner ;
  - ii) dispensing of the embodiment in between two affixing guide rollers ;
  - 15 iii) affixing of the WSF films from step 2 at the affixing rollers ;
  - iv) rewinding in roll form or sheet form or fan-fold form.
- 20
23. A process as claimed in claim 22 providing for multilayered products with layering selected from uncured, hot water soluble film, cold water soluble film, embedded material and liner.
24. A process as claimed in anyone of claims 5 to 23 wherein the film is cast with or without casting liners.
- 25
25. A process as claimed in anyone of claims 5 to 24 in which the casting liners is stripped immediately or after aging period of 1 to 720 hrs. or is supplied all together with the end user stripping the casting liner before use.
- 30
26. A process as claimed in anyone of claims 5 to 25 wherein the embedded/entrapped WSF is adapted to be slit in ribbons, tapes, perforated sheets, perforated tapes, perforated ribbons or cut sheets of any size.

27.A process as claimed in anyone of claims 5 to 26 adapted to produce a range of product selected from :

- a. Embedded/Entrapped material in WSF with or without carrier.
- 5 b. Embedded /Entrapped material in WSF in Roll form or pouch form
- c. Embedded /Entrapped material in WSF in Roll form with perforates
- d.Embedded /Entrapped material in WSF in Sheet form with multiple pouches
- e. All above Entrapped material in WSF with casting liner for the consumer to remove immediately or after aging period of around 1 hr to around 720 hrs.

10

28.A process as claimed in claim 21 wherein the Offline Horizontal Entrapment comprise :

- i) unwinding of the WSF films with or without liner.
- 15 ii) dispensing of the materials to be embedded/entrapped at in between two affixing guide rollers ;
- iii) affixing of the WSF films from step (ii) at the affixing rollers ;
- iv) rewinding in roll form or sheet form or fan-fold form.

20

29.A process as claimed in claim 28 in which the film is optionally cast with or without casting liners.

30.A process as claimed in anyone of claims 28 or 29 in which the casting liners is stripped immediately or after aging period of around 1 to around 720 hrs. or is supplied all together with the end user stripping the casting liner before use.

25

31.A process as claimed in anyone of claims 28 or 29 in which the embedded/entrapped WSF is adapted to be slit in ribbons, tapes, perforated sheets, perforated tapes, perforated ribbons or cut sheets of any size.

30

32.A process as claimed in anyone of claims 28 to 31 adapted to produce a range of product selected from :

- a. Embedded/Entrapped material in WSF with or without carrier.
- b. Embedded /Entrapped material in WSF in Roll form or pouch form
- c. Embedded /Entrapped material in WSF in Roll form with perforates
- 5 d.Embedded /Entrapped material in WSF in Sheet form with multiple pouches
- e. All above Entrapped material in WSF with casting liner for the consumer to remove immediately or after aging period of around 1 hr to around 720 hrs.

10 33.A process as claimed in anyone of claims 5 to 32 in which the WSF film is pre-embedded and used as the starting material(s).

15 34.A process as claimed in anyone of claims 5 to 33 comprising embedding/entrapping of materials which are stable in hot water conditions into and/or in between Hot Water Soluble Films and those that are sensitive to cold conditions Hot Water Soluble Films.

20 35.A process as claimed in anyone of claims 14 to 33 wherein the entrapping of materials that are as alkaline or acidic that may react adversely if added in the batch mix process or if sprayed before the gelling of the WSF or before the film forming process is completed, using the said entrapment process.

25 36.A process as claimed in anyone of claims 14 to 33 wherein the entrapping of materials of liquids like oil based perfumes, aromas, softening agents, cleaning agents etc or solvent based aromas, softening agents, cleaning agents by the said entrapped process.

30 37.A process of manufacturing of WSFs with materials embedded as claimed in anyone of claims 5 to 31 in selective areas of the WSFs in desired shapes.

38.A process as claimed in anyone of claims 14 to 33 for the manufacture of WSFs with materials embedded in selective areas of the WSFs in desired

shapes with the use of dimpled or other embossed or patterned designs on specially designed male/female rollers or rollers described herein for use during entrapment in the said process.

- 5        39. A process as claimed in anyone of claims 14 to 33 wherein in case of casting on liner method both the liners along with WSF film in which the semi-cured WSF and the entrapments remain in roll form or sheet form in its original construction and the stripping from casting liner is done immediately or after  
10        an self curing aging period ranging from around 1 hrs to around 720 hrs., prior to splitting the liners so as to deliver the final WSF film with entrapped materials.
- 15        40. A process as claimed in anyone of claims 5 to 39 wherein the liner either single or in combination is selected from materials such as paper, film, foil or fabric, preferably of film, more preferably of polyester film.
- 20        41. A process as claimed in anyone of claims 5 to 40 wherein the films range from around 2 microns to around 500 microns, preferably in the range of around 10 microns to around 300 microns, more preferably in the range of around 12 microns to around – 250 microns.
- 25        42. A process as claimed in anyone of claims 5 to 41 wherein the film liner are selected from plain, embossed, metalised, gloss, matte, extrusion coated laminated or release coated depending on the desired characteristics of the end product.
- 30        43. A process as claimed in anyone of claims 5 to 42 wherein the Paper Liner are selected from those that stable at temperatures for production of WSF.
44. A process as claimed in anyone of claims 5 to 43 wherein the thickness of the paper liner are of GSM in the range of around 7 gms to around 500 gms,



preferably a range of around 20 gm to around 300 gms, more preferably in the range of around 60 gm to around 180 gms.

5 45. A process as claimed in anyone of claims 5 to 44 wherein the paper liner are selected from those that are plain, embossed, metalised, gloss, matte, extrusion coated laminated or release coated depending on the desired characteristics of the end product.

10 46. A process as claimed in anyone of claims 5 to 45 wherein the Fabrics are selected from cotton or synthetic yarns, solution coated, plain, embossed, gloss, matte, extrusion coated or laminated may be used as liner based on the desired end product properties.

15 47. A process as claimed in anyone of claims 5 to 46 for the manufacture of WSFs comprising a wide range of raw materials selected from polyvinyl alcohol copolymer ionomers, polyvinyl alcohol homopolymer, non – ionomeric poly vinyl alcohol polymer, polymethacrylate, polyvinyl alcohol, polyacrylamide, polymethacrylamide, polyacrylic acid, polymethacrylic acid, polyethyleneglycol, polyvinylpyrrolidone, proteinaceous binders such as  
20 gelatin modified gelatins such as phthaloyl gelatin, polysaccharides, such as starch, gum arabic and dextrin and water-soluble cellulose derivatives.

25 48. A process as claimed in anyone of claims 5 to 47 for manufacturing bilayered and/or multilayered water soluble films (WSFs) for diverse applications, in which a variety substances that are interacting and/or non-interacting, miscible and/or immiscible, similar /dissimilar such as detergents, enzymes, softeners, perfumes, pesticides, fungicides, active ingredients, dyes, pigments, hazardous chemicals, absorbent fluff, pulp, e.g. diapers, active  
30 agents for cleaning laundry, dishes, floorings, walls, furniture, water soluble gases and the like are embedded/entrapped for delivering them in precise and desired quantities.

49. A process as claimed in anyone of claims 5 to 48 in which materials that are stable in hot water conditions are embedded/entrapped between Hot Water Soluble Films and those that are sensitive to cold conditions are embedded/entrapped between Hot or Cold Water Soluble Films.

5

50. A product/package comprising a WSF system as claimed in anyone of claims 1 to 4 wherein said water soluble film base and the active material are selectively embedded/entrapped such that the actives are protected from environment factors until it is used.

10

51. A product/package as claimed in claim 50 comprising carrier liner adapted to be atleast partially removed before use for dispensing of partial or whole of the said embedded/entrapped actives from said WSF.

15

52. A WSF system and its process of manufacture substantially such as herein described and illustrated with reference to the accompanying figures and examples.


20

25

30


35

1/4

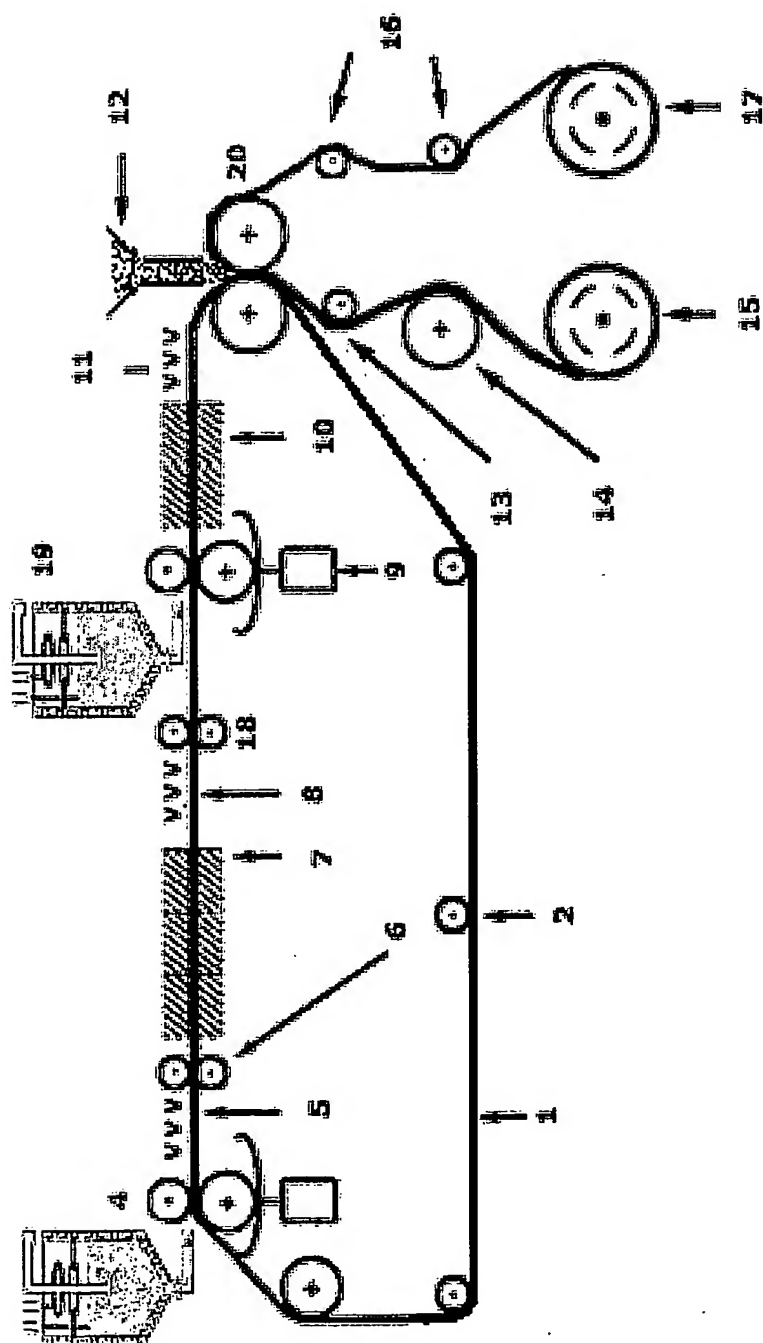


Full Diagram - All Methods  
( Casting on Conveyor )

2/4

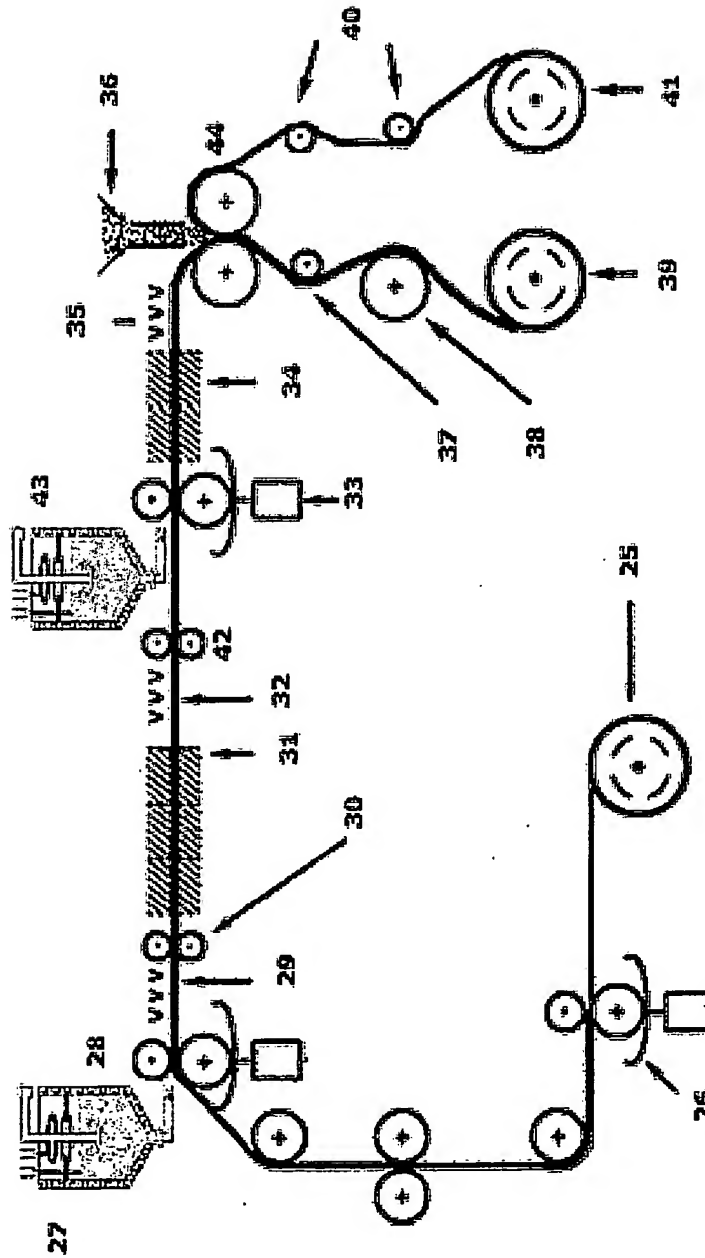


Full Diagram - All Methods  
(Casting on Liner)


3/4

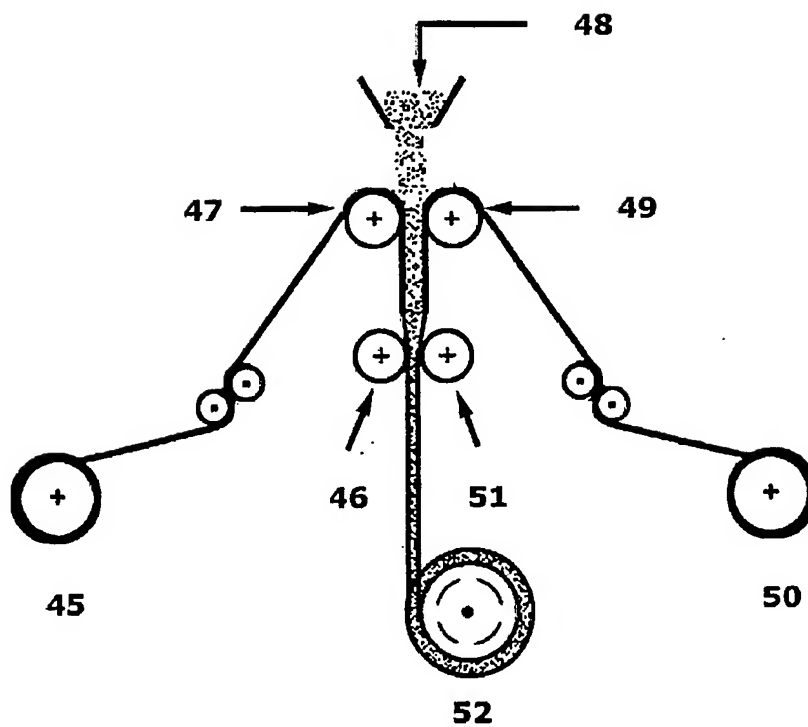


Vertical Method

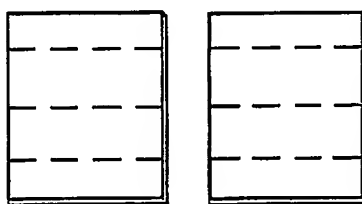

Perforated Sheets or Rolls

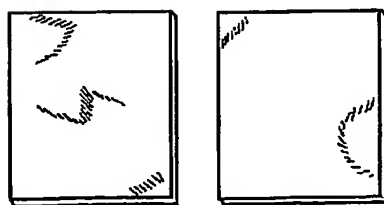


Cut Sheet



Fanfold

4/4

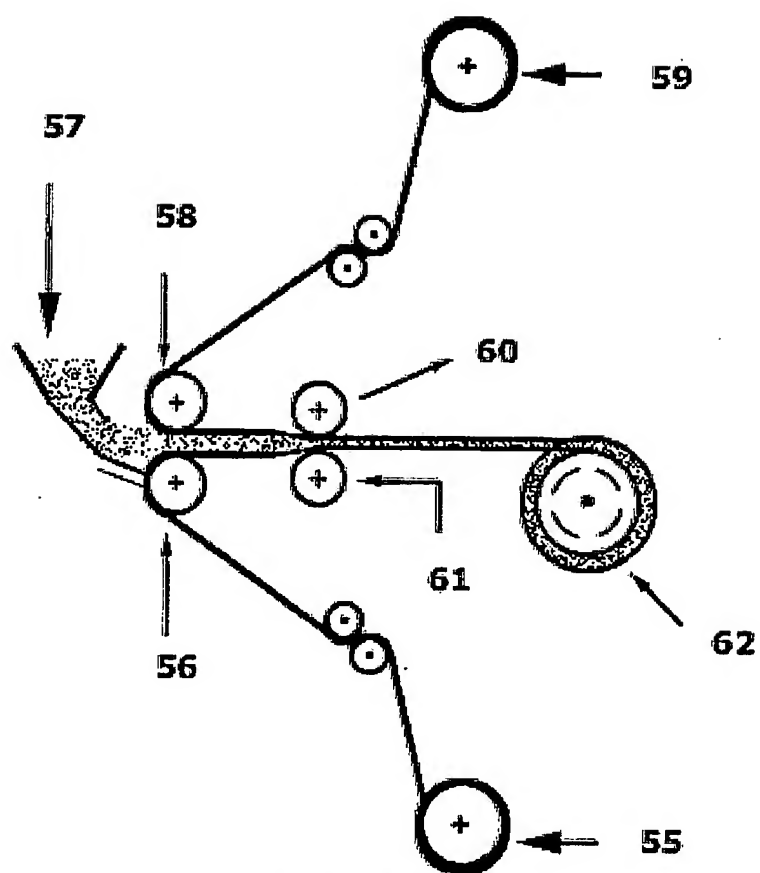

Horizontal Method

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IN 02/00202

A. CLASSIFICATION OF SUBJECT MATTER		
IPC 7	C11D17/04	C11D17/06 C11D17/00 C08J5/18
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC 7 C11D C08J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
EPO-internal, WPI Data, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 20774 A (ECOLAB INC) 26 November 1992 (1992-11-26) page 3, line 5 -page 4, line 17 page 19, line 34 -page 24, line 20 page 26, line 2-29; examples ---	1-52
X	US 5 316 688 A (GLADFELTER ELIZABETH J ET AL) 31 May 1994 (1994-05-31) column 2, line 3-45 column 10, line 1 -column 12, line 32 column 13, line 53 -column 14, line 4; claims; examples ---	1-52
X	EP 0 347 220 A (MAY & BAKER LTD) 20 December 1989 (1989-12-20) column 6, line 18-29; claims; examples ---	1-52
	-/-	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *&* document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
17 Apr11 2003		28/04/2003
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer  Pentek, E

## INTERNATIONAL SEARCH REPORT

Internat<sup>n</sup> # Application No

PCT/IN 02/00202

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 244 258 A (RHONE POULENC AGRICULTURE) 27 November 1991 (1991-11-27) page 3, line 6 -page 6, line 22; claims ---	1-52
X	EP 0 716 144 A (UNILEVER PLC ;UNILEVER NV (NL)) 12 June 1996 (1996-06-12) page 7, line 23-40; claims ---	1-52
X	US 4 176 079 A (GUERRY RAYMOND E ET AL) 27 November 1979 (1979-11-27) cited in the application column 1, line 6-20 column 2, line 41 -column 3, line 20 column 16, line 31 -column 17, line 64; claims; examples -----	1-52



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IN 02/00202

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9220774	A	26-11-1992	AT 121128 T	15-04-1995
			AU 661491 B2	27-07-1995
			AU 2007592 A	30-12-1992
			CA 2107356 A1	15-11-1992
			DE 69202055 D1	18-05-1995
			DE 69202055 T2	24-08-1995
			DK 585363 T3	04-09-1995
			EP 0585363 A1	09-03-1994
			ES 2073302 T3	01-08-1995
			JP 3135066 B2	13-02-2001
			JP 7500850 T	26-01-1995
			MX 9202256 A1	01-08-1993
			NZ 242700 A	28-03-1995
			US 6211129 B1	03-04-2001
			WO 9220774 A1	26-11-1992
			US 6455484 B1	24-09-2002
US 5316688	A	31-05-1994	AT 125565 T	15-08-1995
			AU 659848 B2	01-06-1995
			AU 2016292 A	30-12-1992
			CA 2104880 A1	15-11-1992
			DE 69203721 D1	31-08-1995
			DE 69203721 T2	11-01-1996
			DK 585352 T3	27-12-1995
			EP 0585352 A1	09-03-1994
			ES 2078049 T3	01-12-1995
			GR 3017791 T3	31-01-1996
			JP 6507667 T	01-09-1994
			MX 9202257 A1	01-08-1993
			NZ 242699 A	22-12-1994
			WO 9220775 A1	26-11-1992
EP 0347220	A	20-12-1989	GB 2230445 A	24-10-1990
			AT 146148 T	15-12-1996
			AT 145187 T	15-11-1996
			AT 146432 T	15-01-1997
			AT 150724 T	15-04-1997
			AT 177399 T	15-03-1999
			AT 177395 T	15-03-1999
			AT 179139 T	15-05-1999
			AU 642851 B2	04-11-1993
			AU 3767689 A	12-01-1990
			AU 642853 B2	04-11-1993
			AU 3837589 A	12-01-1990
			AU 642855 B2	04-11-1993
			AU 3839689 A	12-01-1990
			AU 643423 B2	18-11-1993
			AU 3840389 A	12-01-1990
			AU 4498893 A	02-12-1993
			BR 8907491 A	21-05-1991
			BR 8907492 A	21-05-1991
			BR 8907493 A	21-05-1991
			BR 8907494 A	21-05-1991
			CA 1334285 A1	07-02-1995
			CA 1334832 A1	21-03-1995
			CA 1334833 A1	21-03-1995
			CA 1337638 A1	28-11-1995
			CZ 8903625 A3	16-03-1994

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IN 02/00202

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0347220 A		CZ 8903626 A3	16-03-1994
		CZ 8903627 A3	16-03-1994
		CZ 8903628 A3	16-03-1994
		DE 68927449 D1	19-12-1996
		DE 68927449 T2	15-05-1997
		DE 68927536 D1	23-01-1997
		DE 68927536 T2	05-06-1997
		DE 68927563 D1	30-01-1997
		DE 68927563 T2	12-06-1997
		DE 68927901 D1	30-04-1997
		DE 68927901 T2	14-08-1997
		DE 68928949 D1	15-04-1999
		DE 68928950 D1	15-04-1999
		DE 68928976 D1	27-05-1999
		DE 68928976 T2	02-12-1999
		DK 297290 A	14-02-1991
		DK 297390 A	14-02-1991
		DK 297490 A	14-02-1991
		DK 297590 A	14-02-1991
		EG 18901 A	30-11-1994
		EG 19448 A	31-10-1995
		EG 19268 A	30-08-1994
		EG 19220 A	30-07-1994
		EP 0347219 A1	20-12-1989
GB 2244258 A	27-11-1991	US 5080226 A	14-01-1992
		AP 245 A	04-03-1993
		AU 653519 B2	06-10-1994
		AU 7611491 A	07-11-1991
		BE 1003800 A5	16-06-1992
		BR 9101835 A	17-12-1991
		CA 2041313 A1	03-11-1991
		CH 684468 A5	30-09-1994
		CN 1056468 A	27-11-1991
		CS 9101249 A2	17-12-1991
		DE 4113786 A1	07-11-1991
		DE 4143441 C2	20-10-1994
		DK 81191 A	03-11-1991
		EG 19559 A	29-02-1996
		ES 2033572 A1	16-03-1993
		ES 2065293 A1	01-02-1995
		FI 912135 A	03-11-1991
		FR 2665889 A1	21-02-1992
		GR 91100175 A ,B	30-07-1992
		HU 63109 A2	28-07-1993
		IE 911248 A1	06-11-1991
		IL 97977 A	26-08-1994
		IT 1250919 B	21-04-1995
		JP 4225903 A	14-08-1992
		JP 8022802 B	06-03-1996
		KR 9509507 B1	23-08-1995
		LU 87924 A1	03-03-1992
		NL 9100706 A ,B,	02-12-1991
		NL 9300911 A	01-10-1993
		NZ 238015 A	25-11-1992
		PT 97521 A	31-08-1993
		SE 9101245 A	03-11-1991
		RU 2066666 C1	20-09-1996

# INTERNATIONAL SEARCH REPORT

national on patent family members

International Application No

PCT/IN 02/00202

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2244258	A	TR 27238 A	20-12-1994
		US 5280835 A	25-01-1994
		US 5624034 A	29-04-1997
		ZA 9103276 A	29-04-1992
		AP 325 A	09-03-1994
		AP 280 A	03-08-1993
		AP 358 A	03-09-1994
		AP 357 A	03-09-1994
		AP 356 A	03-09-1994
		AT 150253 T	15-04-1997
		AT 184746 T	15-10-1999
		AT 184748 T	15-10-1999
		AT 184747 T	15-10-1999
		AT 184749 T	15-10-1999
		AU 8039591 A	23-01-1992
		AU 8039691 A	23-01-1992
		AU 8039791 A	23-01-1992
EP 0716144	A	12-06-1996	EP 0716144 A2
		29-06-1999	US 5916866 A
US 4176079	A	27-11-1979	NONE